

COMPRESSOR
성능에 **감동**하고
SUCTION
소음에 **감탄**하라!



Oilless Air compressor & Dry-Suction System



DS-202 SERIES

1. COMPACT DESIGN.
2. LOW NOISE, LOW VIBRATION, THE BEST DURABILITY WITH SAFETY DOUBLE HEAD
3. CLEAN AIR OUTPUT INSTALLED AFTER COOLER AND AIR FILTER
PRESSURE, VACUUM LOADING TIME 24HOUR..
4. OVER CURRENT PROTECTION SENSOR AND MOTOR SENSOR FOR OVERHEAT PROTECTION INSTALLED



DS-202S



DS-202W



DS-202D[W]

SPECIFICATION

MODEL	DS-202S	DS-202W	DS-202D[W]
MOTOR TYPE	RAD 120 (Double head type)		
VOLTAGE / FREQUENCY	AC-220V / 60Hz (50Hz)		
MAX. PRESSURE (bar)	8.0 / 7.0 bar		
FREE FLOW (LPM)	240L		
AIR TNAK MATERIAL	ALUMIMUM		
TANK CAPACITY (Liter)	40L		
NOISE LEVLE	60dB		
OPTION	기본사양	WATERSEPARATOR	WATER SEPARATOR DRYER
DIMENSIONS (L×W×Hmm)	500mm×550mm×750mm		



※ WATER SEPARATOR 란? 수분을 99.9%제거 필터[반영구적 사용]

DS-302 SERIES

1. COMPACT DESIGN.
2. LOW NOISE, LOW VIBRATION. THE BEST DURABILITY WITH SAFETY DOUBLE HEAD
3. CLEAN AIR OUTPUT INSTALLED AFTER COOLER AND AIR FILTER
PRESSURE, VACUUM LOADING TIME 24HOUR..
4. OVER CURRENT PROTECTION SENSOR AND MOTOR SENSOR FOR OVER HEAT PROTECTION INSTALLED



DS-302S



DS-302W



DS-302D[W]

SPECIFICATION

MODEL	DS-302S	DS-302W	DS-302D[W]
MOTOR TYPE	RAD 120 (Double head type)		
VOLTAGE / FREQUENCY	AC-220V / 60Hz (50Hz)		
MAX. PRESSURE (bar)	8.0 / 7.0 bar		
FREE FLOW (LPM)	360L		
AIR TNAK MATERIAL	ALUMIMUM		
TANK CAPACITY (Liter)	40L		
NOISE LEVLE	65dB		
OPTION	기본사양	WATERSEPARATOR	WATERSEPARATOR DRYER
DIMENSIONS (L×W×Hmm)	500mm×550mm×750mm		



※ WATER SEPARATOR 란?

Oil and water mist 99.99% cleared [semipermanent]

DS-402 SERIES


1. COMPACT DESIGN,
2. LOW NOISE, LOW VIBRATION, THE BEST DURABILITY WITH SAFETY DOUBLE HEAD
3. CLEAN AIR OUTPUT INSTALLED AFTER COOLER AND AIR FILTER PRESSURE, VACUUM LOADING TIME 24HOUR,.
4. OVER CURRENT PROTECTION SENSOR AND MOTOR SENSOR FOR OVER HEAT PROTECTION INSTALLED



**DUAL [2HP+2HP]
SPARE COMPRESSOR FOR EMERGENCY**



DS-402D[W]

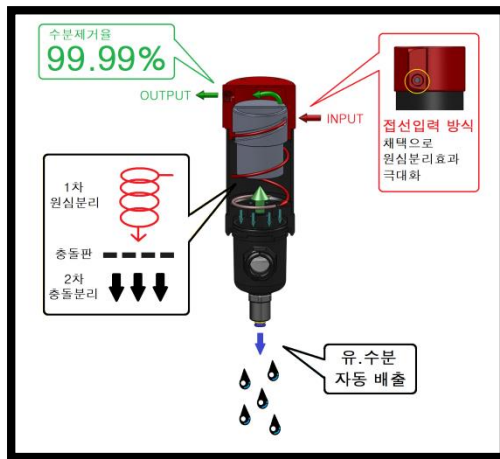

SPECIFICATION

MODEL	DUAL	DS-402D[W]
MOTOR TYPE	RAD 120 (Double head type)	
VOLTAGE / FREQUENCY	AC-220V / 60Hz (50Hz)	
MAX. PRESSURE (bar)	8.0 / 7.0 bar	
FREE FLOW (LPM)	240L	480L
AIR TNAK MATERIAL	ALUMIMUM	
TANK CAPACITY (Liter)	60L	
NOISE LEVLE	60dB	68dB
STANDARD EQUIPMENT	WATER SEPARATOR, DRYER	
DIMENSIONS (L×W×Hmm)	800mm×550mm×750mm	

※ WATER SEPARATOR 란? 수분을 99.9%제거 필터[반영구적 사용]

CASE & WATER SEPARATOR




**DS COMPRESSOR CASE
WHOLE PRODUCT APPLICATION**

GOOD DESIGN AND EASY TO MOVEMENT!

LOW NOISE USED BY LAB AND HOSPITAL ,SCHOOL/

DS COMPRESSOR CASE SPECIFICATION

MODEL	COMPRESSOR CASE
DIMENSIONS (L×W×Hmm)	750mm×600mm×850mm
DS-402D[W] CASE	800mm×600mm×850mm

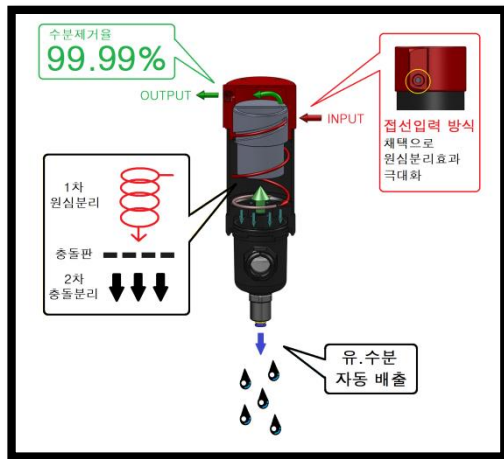

**Water Separator
[워터세퍼레이터]**

- ☞ **OIL, WATER MIST COMPLETELY 99,99%**
- ☞ **HIGH QUALITY, LOW COST !!**
- ☞ **COMPACT AND GOOD DESIGN,
[AL6061 DURALUMIN MATERIAL,, ANODIZED FOR EROSION PROTECTION**

Water Separator SPECIFICATION

MODEL	DS-100	DS-300
MAX. FLOW RATE	100ℓ/min	300ℓ/min
MAX. PRESSURE	1~10 kg/cm ²	1~10 kg/cm ²
OPER. TEMP.	0~60°C	0~60°C
DIAMETER	56 mm	85 mm
HEIGHT	203 mm	275 mm

SUCTION [WET]

Safety and strong suction power . Good durability low noise, low vibration usable for dental unit and chair from 1set to 3set



SMART



[Option] SUCTION SILENCER



SSEDA

SPECIFICATION

MODEL	WET SMART SUCTION	SSEDA SUCTION WET
MOTOR (HP)	750W [1HP]	850W [1.2HP]
VOLTAGE / FREQUENCY	AC-220V / 60Hz	AC-220V / 60Hz
RUNNING AMPS	5 AMP	5 AMP
MAX. VACUUM POWER	65 cmHg	65 cmHg
MAX. SUCTION VOLUME (LPM)	300L / Min	320L / Min
COMPRESSOR SPEED (RPM)	3,450 RPM	3,450 RPM
NUMBER OF TREATMENT UNIT	3 Units	4 Units
WEIGHT	24Kg	16.7Kg
OPTION	SUCTION SILENCER [소음기]	
DIMENSIONS (L×W×Hmm)	290mm×260mm×380mm	280mm×300mm×330mm

SUCTION [Dry]

1. No need to connect by water line,
2. 2head applacation. On breaking down Suction motor, usable by 1 head
3. Safety and low noise, low vibration and strong suction power, the best durability.
4. water over flow protection by sensor



DUAL SMART SUCTION

SPECIFICATION	MODEL	DUAL SMART SUCTION
MOTOR TYPE		RVD 140
VOLTAGE / FREQUENCY		AC-220V / 60Hz (50Hz)
RUNNING AMPS		3AMP
MAX. VACUUM POWER		700 mmHg
MAX. SUCTION VOLUME (LPM)		280L / Min
NOISE LEVEL		55 dB(A)
NUMBER OF TREATMENT UNIT		3 Units
WEIGHT		35Kg
DIMENSIONS (L×W×Hmm)		290mm×260mm×380mm
WARRANTY		3 year



Novavox corp.

Oversea Marketing Company : Pyung wha art building 1st floor, #128-4Dowha-dong,
Nam-gu,Incheon,Korea

Tel. +82 32 563 2745, Fax: +82 32 714 3888

E-mail: info@novavox.net